custom-designed, radiant floor heat mats









Gold Heat vs. other radiant floor heat methods.

	Install speed	Complex floor plans	1-step installation	Tile same day	Low profile	Servicable	Diagnostics
Cable & strip	0	/	0	?	/	0	?
Cable & membrane	0	1	0	0	0	0	?
Rolled wire & mesh (tape mat)	0	0	✓	?	✓	0	?
Competition's mat	/	1	0	0	0	0	0
Gold Heat®	✓		·			/	· 1



"The proof is in the install."


"I installed Gold Heat mats under natural stone, LVP and LVT.

Without a doubt, the customization of a Gold Heat mat makes it the fastest radiant floor heat product that I have ever installed."



FLOOR PLAN

(2) Gold Heat mats on one zone (one thermostat controller) for a total of 100 heated sf.

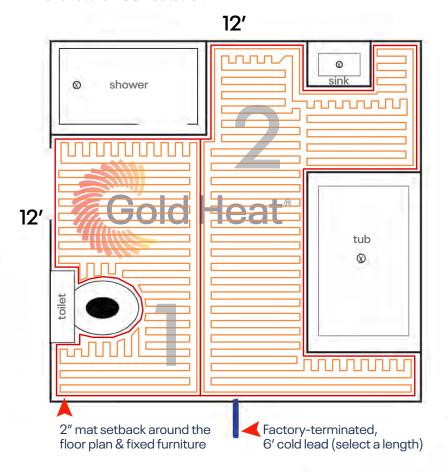



Even heating throughout the home.

Gold Heat mat specifications

- Standard 120v or 240v line power
- 15 watts per square foot
- Max width 91" x Max length 330"
- Cold lead lengths 6', 10' or 20'
- Min area 3 sf @ 120 volts | 6 sf @ 240 volts
- One thermostat controls multiple heat mats
- Max area 108 sf @ 120 volts | 216 sf @ 240 volts
- Max 1800 watts @ 120 volts | 3600 watts @ 240 volts

Featuring

- Custom-designed mat fits every floor plan
- Made for natural stone, ceramic, marble, LVT & LVP[†]
- Out-of-the-box, mat is ready-to-install
- Save 1/2 day of tile installation prep
- Lay tile the same day
- Takes less than 20 minutes to layout & hook up
- · Diagnostic and mat troubleshooting
- Personalized before & after support

Optional

thermostats



Ready-to-install, right out-of-the-box. Custom Gold Heat electric radiant floor heat mat (pre-terminated)

Optional

thermal sensors